



1/2

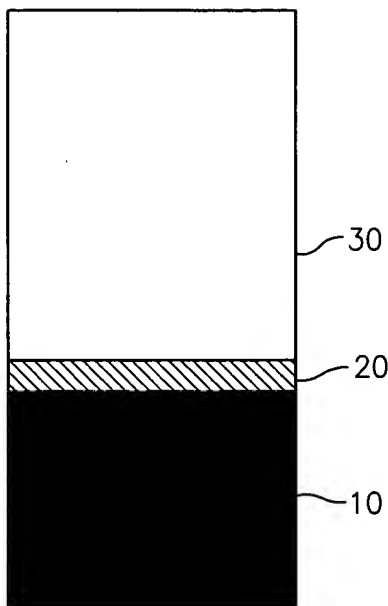


FIG. 1

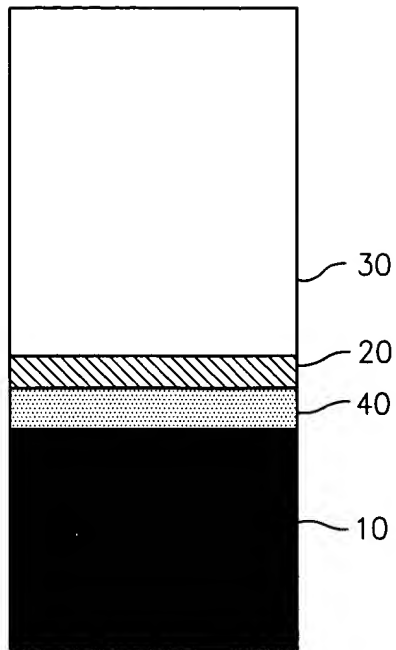


FIG. 2

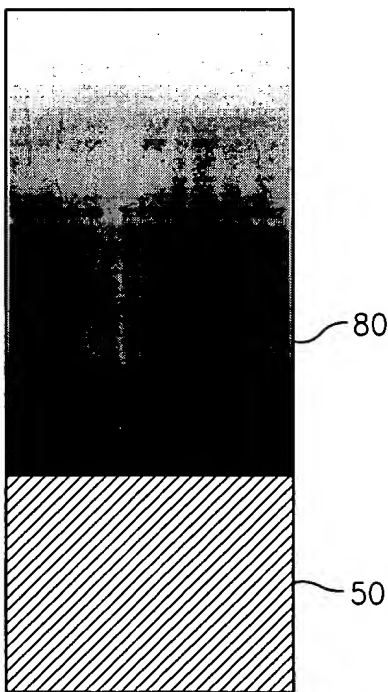


FIG. 3

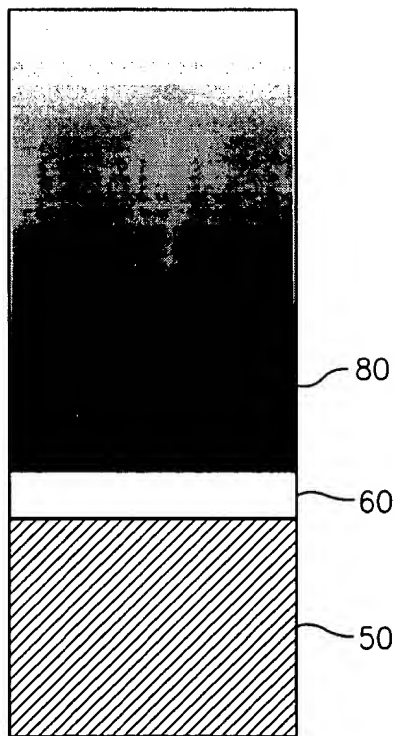


FIG. 4



R/N VALUES AS A FUNCTION OF TIN THICKNESS
--- 250 g Load ---

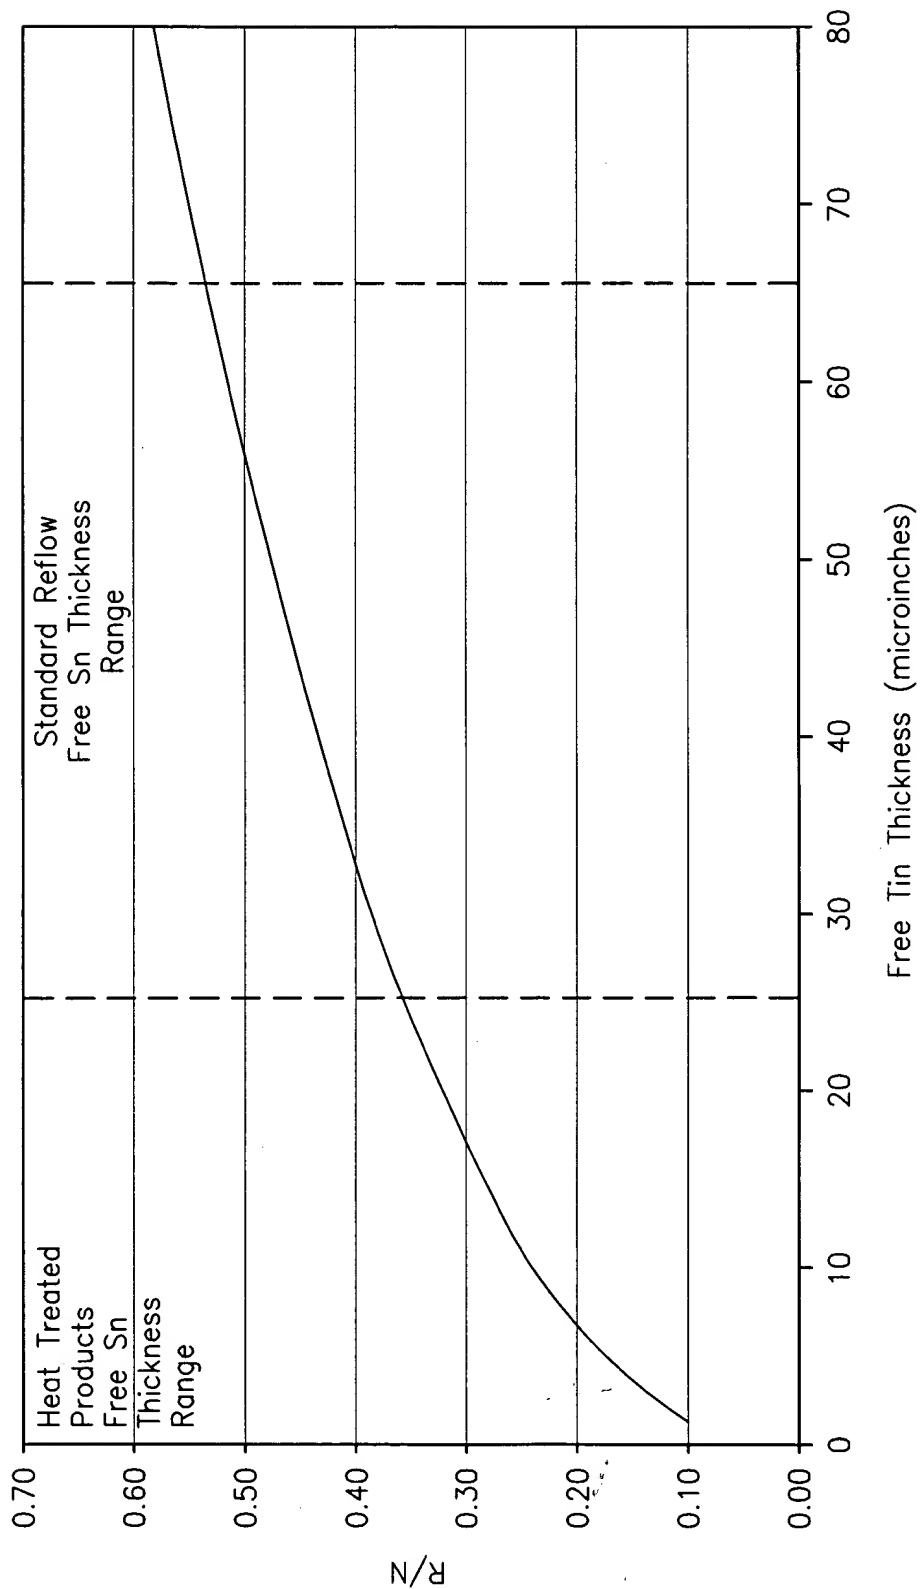


FIG. 5